



IP65


Specifications

| | |
|------------------|------------------------------|
| Input Voltage : | 24V DC / 110V AC / 230V AC |
| Wattage | 14W |
| Operating Temp | 0 to 70 degree celcius |
| Protection Grade | IP65 |
| Control Gear | Onboard |
| CRI | 82 Typical |
| Luminaire body | SMD LED strip |
| No. of LED's | 36 |
| LED color | Cool white / 6500K |
| O/P Power | 14W |
| O/P Current | 0.70 A |
| Led Make | Edison / Everlight / Osram |
| Lumens | 1400 Lm |
| Light View Angle | 120 ° |
| Lamp Housing | Aluminium with Toughen Glass |
| Fastening | End Brackets |
| Lamp Weight | Approx. 835 Grams |
| Cable Length | 3 Meters |
| Avg. Life Hours | 30,000 Hrs |

Ordering Code

| Model | Voltage | Wattage | Total Length |
|------------------|---------|---------|--------------|
| SMC-CNC-AH-4-1-L | 24 VDC | 14 W | 565 mm |
| SMC-CNC-AH-4-2-L | 110 VAC | 14 W | 565 mm |
| SMC-CNC-AH-4-3-L | 230 VAC | 14 W | 565 mm |

Dimensional Drawings

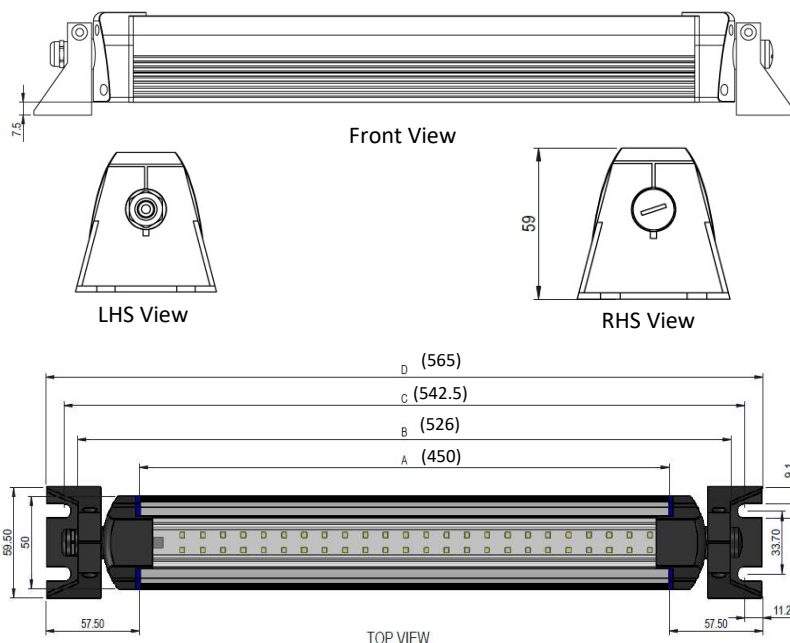

Features

- Ideal for CNC & SPM Machines
- CE Certified
- Coolant, Water & dust proof hence suitable for wet & dry applications
- Aluminium Housing with Toughened Glass
- 360 degree Adjustable viewing angle
- Excellent Cool Day Light
- Fixed Mounting
- IP 65 grade protection
- Used good quality Aluminium with excellent anti-corrosion and good heat dissipation
- Easily Mountable either Vertically or Horizontally
- Stringently checked on various criterion of performance
- Longer Functional Life