



### Specifications

<b>Input Voltage :</b>	12V -24V AC/DC – 110V/230VAC
<b>Operating Temperature</b>	0°C to 70°C
<b>Luminaire</b>	PCB Mounted LED's
<b>LED Power dissipation</b>	72mW
<b>CRI</b>	82 Typical
<b>LED Color</b>	Red / Amber / Green / Blue / Clear
<b>Functions</b>	Steady / Flashing / Buzzer
<b>Foldable</b>	180 degree
<b>Protection grade</b>	IP 54
<b>Aluminium Stem</b>	50 mm
<b>Flasher</b>	IC 555 & TIP 127 Transistor
<b>LED operating current</b>	20 mA
<b>Buzzer Current</b>	100 mA
<b>Buzzer Sound</b>	<100 db
<b>Diameter</b>	∅ 60 mm
<b>Average Life Hours</b>	30000 Hrs
<b>Luminous Intensity</b>	<b>Red :</b> 900-1200 mcd <b>Amber :</b> 400-900 mcd <b>Green :</b> 2000-2200 mcd <b>Blue :</b> 200-500 mcd <b>Clear :</b> 800-1100 mcd

### Ordering Codes

#### With Buzzer Models

SMC-F-1-T-1- (R/A/G/B/C)-(B/F/O)	24V AC/DC
SMC-F-1-T-2- (R/A/G/B/C)-(B/F/O)	110 VAC
SMC-F-1-T-3- (R/A/G/B/C)-(B/F/O)	230 VAC


#### Without Buzzer Models

SMC-F-1-T-1- (R/A/G/B/C)-(F/O)	24V AC/DC
SMC-F-1-T-2- (R/A/G/B/C)-(F/O)	110 VAC
SMC-F-1-T-3- (R/A/G/B/C)-(F/O)	230 VAC

### Features

- Lamp for machine status Indication
- Suitable for machines and equipments in high light output LED's
- CE certified
- ROHS Compliant
- IP 54 grade Protection
- 180 degree Foldable
- Heat Resistant, shock proof & easily mountable
- Stringently checked on various criterion of performance
- Modular design with superior finishing & tamperproof packaging
- Longer functional life

### Dimensional Drawing

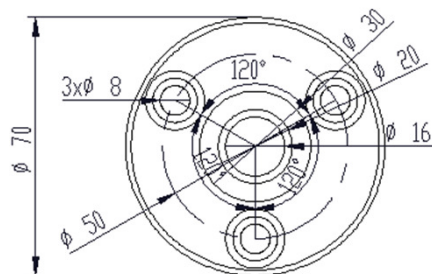

BOTTOM VIEW  
MOUNTING DETAILS

