



RELAY MODULES

SOLID STATE RELAY MODULE (DC TO DC)

- WITH PLUGABLE & REPLACEABLE RELAYS
- VARIABLE CHANNEL OPTIONS
- AVAILABLE IN (1 / 2 / 4 / 8 CH)
- CHANGEOVER OPTION : 1 CO
- LED INDICATION AT OUTPUT
- DIN RAIL MOUNTING
- INPUT : 3V DC TO 32V DC, OUTPUT : 5V DC TO 100V DC
- 5A CONTACT RATING



CNC SPECIFIC I/O INTERFACE MODULE

- PASSIVE CUM RELAY INTERFACE MODULE WITH OPTIONAL FUSE
- WITH PLUGABLE & REPLACEABLE RELAYS
- DIN RAIL MOUNTING
- WITH / WITHOUT FUSE
- 20 INPUT - 16 OUTPUT
- 24 INPUT - 16 OUTPUT
- 40 INPUT - 16 OUTPUT
- COMPATIBLE WITH FANUC, SIEMENS I/O MODULE



FUSE MODULE

- DIN RAIL MOUNTING
- NO. OF FUSES : 4 / 8 / 16 / 32
- LED INDICATION AT INPUT OUTPUT & FUSE FAILED
- EASILY MOUNTABLE VERTICAL FUSE HOLDER
- DIODE FOR REVERSE POLARITY PROTECTION
- I/P & O/P CONNECTION : SCREW TYPE CONNECTOR



CONTROL PANEL LUMINARIES

LED PANEL LAMP

- METALIC HOUSING
- BRIGHT LIGHT
- WATTAGE OPTION : 8W
- EASILY MOUNTABLE
- ON-OFF SWITCH
- IP 54 GRADE PROTECTION
- VOLTAGE OPTIONS : 24 V DC / 110V AC / 230V AC
- HEAT RESISTANT & SHOCK PROOF
- SIZE: 335 X 50 mm



LED SLIM PANEL LAMP

- ALUMINIUM HOUSING
- BRIGHT LIGHT
- ON-OFF SWITCH
- IP 54 GRADE PROTECTION
- WATTAGE OPTION : 7W (1FT) 14W (2 FT) / 20W (4 FT)
- VOLTAGE OPTIONS : 24 V DC / 110V AC / 230 V AC
- HEAT RESISTANT & SHOCK PROOF
- EASILY MOUNTABLE
- SIZE: 355 X 30 mm (1 FT), 650 X 30 mm (2 FT)



STANDARD RELAY MODULE

- WITH PLUGABLE & REPLACEABLE RELAYS
- VARIABLE CHANNEL OPTIONS
- AVAILABLE IN (1/2/4/8/12/16 CH)
- AVAILABLE IN (1/2/4 CO)
- LED INDICATION AT OUTPUT
- VARIABLE CHANGEOVER OPTIONS
- FREE WHEELING DIODE ACROSS RELAY COIL
- DIN RAIL MOUNTING
- SUPPLY ROUTING THROUGH FLEXIBLE JUMPERS
- VOLTAGE OPTIONS : 12V DC/ 24V DC/ 110 V AC/ 230V AC



PASSIVE INTERFACE MODULE

- PASSIVE INTERFACE MODULE- FRC TO TERMINAL BLOCK
- CONVERTING CONVENTIONAL WIRING INTO MODULAR WIRING
- DIN RAIL MOUNTING
- LED INDICATION AT OUTPUT
- INPUT 14 / 20 / 26 / 34 / 40 / 50 / 64 PIN
- INPUT CONNECTION : FRC CONNECTOR
- OUTPUT CONNECTION: SCREW TYPE CONNECTOR
- MAX WIRE SIZE :2.5 SQ.MM
- PCB: GLASS EXPOXY WITH DOUBLE SIDE PATH LACQUER COATING



PASSIVE INTERFACE MODULE - D TYPE

- CONVERTING CONVENTIONAL WIRING INTO MODULAR WIRING
- DIN RAIL MOUNTING
- LED INDICATION AT OUTPUT
- INPUT: 15 / 25 / 37 / 50 PIN
- INPUT CONNECTION : D TYPE CONNECTOR (MALE / FEMALE)
- OUTPUT CONNECTION: SCREW TYPE CONNECTOR
- MAX WIRE SIZE : 2.5 SQ.MM
- PCB : GLASS EPOXY WITH DOUBLE SIDE PATH LACQUER COATING



SOLID STATE RELAY MODULE (DC TO AC)

- WITH PLUGABLE & REPLACEABLE RELAYS
- VARIABLE CHANNEL OPTIONS: AVAILABLE IN (1/2/4/8 CH)
- CHANGEOVER OPTIONS :1 CO
- LED INDICATION AT OUTPUT
- DIN RAIL MOUNTING
- INPUT : 3V DC TO 32V DC, OUTPUT : 12V AC TO 480V AC
- 3A CONTACT RATING



TOWER LAMP

TOWER LAMP

- MACHINE STATUS INDICATION
- AVAILABLE IN 1/2/3/4/5/6 TOWERS
- COLOUR OPTION : RED / AMBER / GREEN / BLUE / YELLOW / WHITE
- IP 54 GRADE PROTECTION
- WALL MOUNTABLE
- VOLTAGE OPTIONS : 12V DC / 24V DC / 110V AC / 230V AC / 415V AC
- FUNCTION OPTIONS : STEADY / FLASHING / BUZZER
- HEAT RESISTANCE & SHOCK PROOF
- SIZE: Dia. 60 mm



TOWER LAMP - FOLDABLE

- 180 DEGREE FOLDABLE
- AVAILABLE IN 1/2/3/4/5/6 TOWERS
- COLOUR OPTIONS : RED / AMBER / GREEN / BLUE / YELLOW / WHITE
- IP 54 GRADE PROTECTION
- WALL MOUNTABLE
- VOLTAGE OPTIONS : 12V DC / 24V DC / 110V AC / 230VAC/ 415V AC
- FUNCTION OPTIONS : STEADY / FLASHING / BUZZER
- HEAT RESISTANCE & SHOCK PROOF
- SIZE: Dia. 60 mm



TOWER LAMP - 3 IN 1

- 3 COLOUR (RAG) IN 1 LAMP
- COLOUR OPTION : RED /AMBER / GREEN
- VOLTAGE OPTION : 24V DC
- IP 54 GRADE PROTECTION
- HEAT RESISTANCE & SHOCK PROOF
- EASILY MOUNTABLE
- FUNCTION OPTION : STEADY / BUZZER
- SIZE: Dia.95 MM X Height 163 mm



TOWER LAMP - 3 IN 1

- 180 DEGREE FOLDABLE
- 3 COLOUR (RAG) IN 1 LAMP
- COLOUR OPTION : RED /AMBER / GREEN
- VOLTAGE OPTION : 24V DC
- IP 54 GRADE PROTECTION
- HEAT RESISTANCE & SHOCK PROOF
- EASILY MOUNTABLE
- FUNCTION OPTION : STEADY / FLASHING / BUZZER
- SIZE: Dia. 60 mm X Height 225 mm



LED BEACON LAMP

- BODY MATERIAL : PVC
- COLOUR OPTION : RED /AMBER / GREEN/ BLUE
- FUNCTION OPTION : STEADY / FLASHING / REVOLVING / BUZZER
- HEAT RESISTANCE & SHOCK PROOF
- VOLTAGE OPTION :12V AC / 12V DC / 24V AC / 24V DC / 110V AC / 110V DC / 230V AC
- EASILY MOUNTABLE
- SIZE: Dia. 95 mm X Height 163 mm



LED BUSBAR LAMP

- MACHINE STATUS INDICATION
- VOLTAGE OPTIONS : 415V AC
- IP 65 GRADE PROTECTION
- EASILY MOUNTABLE
- COLOUR OPTION : RED / AMBER /BLUE
- FUNCTION OPTIONS : STEADY / FLASHING / BUZZER
- HEAT RESISTANCE & SHOCK PROOF
- SIZE: 385 X 90 X 150 mm (L X W X H)



LED INDICATION LAMP

- MACHINE STATUS INDICATION
- COLOUR OPTION : RED / AMBER / GREEN / BLUE / YELLOW / WHITE
- VOLTAGE OPTIONS : 12V DC / 24 V DC
- FUNCTION OPTIONS : STEADY
- IP 54 GRADE PROTECTION
- EASILY MOUNTABLE
- HEAT RESISTANCE & SHOCK PROOF
- SIZE : Dia. 60 mm X Height 66 mm



HAND LAMP

LED HAND LAMP - RECHARGEABLE

- PLASTIC HOUSING
- WATTAGE: 7 WATT
- FAST CHARGING : WITHIN 2 - 3 HOURS
- CHARGER: I/P 230VAC & O/P 12VDC-1AMP
- LI-ION BATTERY 2500 MAH
- HEAT RESISTANT & SHOCK PROOF
- MAGNET & HOOK FOR MOUNTING
- BACK UP : LOW MODE 6-8 HRS & HIGH MODE 3-4 HRS
- SIZE: 393 X 58 X 42 mm



LED HAND LAMP - DIRECT PLUG IN

- PLASTIC HOUSING
- WATTAGE OPTION : 7W
- VOLTAGE OPTIONS : 24 V DC / 230 V AC
- WITH 5 METER CABLE
- WITH SPIRAL CABLE (OPTIONAL)
- WITH SMPS ADAPTER (OPTIONAL)
- IP 54 GRADE PROTECTION
- HEAT RESISTANT & SHOCK PROOF
- EASILY MOUNTABLE
- SIZE: 393 X 58 X 42 mm



LED PORTABLE LAMP - RECHARGEABLE

- ALUMINIUM HOUSING
- WATTAGE : 20 WATT
- HIGH EFFICIENCY COB LED
- LITHIUM - ION BATTERY
- CHARGING TIME: 4 HOURS.
- CHARGER: I/P 230VAC & O/P 12VDC-1 AMP
- CHARGING & CHARGED INDICATOR
- BACK UP: UP TO 4 HOURS
- SIZE: 210 X 155 X 110 mm



MACHINE LAMP

MACHINE LAMP

- IDEAL FOR CNC & SPM MACHINES
- IP 67 GRADE PROTECTION
- COOLANT, WATER-PROOF
- DUST PROOF, HEAT RESISTANT & SHOCK PROOF
- WATTAGE OPTIONS : 9W / 11W/ 14W / 32 W
- EXCELLENT COOL DAY LIGHT ILLUMINATION
- VOLTAGE OPTIONS : 24V DC/ 110VAC/ 230V AC
- EASILY MOUNTABLE EITHER VERTICALLY OR HORIZONTALLY
- SIZE: Dia. 60 MM (STANDARD) OR Dia. 70 mm (CUSTOMIZED)
- LENGTH : CUSTOMIZATION AVAILABLE



MACHINE LAMP - ALUMINIUM HOUSING

- ALUMINIUM HOUSING
- 360 DEGREE ROTATION
- IP 65 GRADE PROTECTION
- EXCELENT COOL DAY LIGHT
- WATTAGE OPTIONS : 7W / 11W / 16W / 24 W
- VOLTAGE OPTIONS : 24V DC/ 110VAC / 230V AC
- EASILY MOUNTABLE EITHER VERTICALLY OR HORIZONTALLY
- SIZE: 60 X 60 X LENGTH CAN BE CUSTOMIZED



MACHINE LAMP

- IDEAL FOR CNC & SPM MACHINES
- IP 67 GRADE PROTECTION
- COOLANT, WATER-PROOF
- DUST PROOF, HEAT RESISTANT & SHOCK PROOF
- WATTAGE OPTIONS : 9W / 11W/ 14W / 32 W
- EXCELLENT COOL DAY LIGHT ILLUMINATION
- VOLTAGE OPTIONS : 24V DC/ 110VAC/ 230V AC
- EASILY MOUNTABLE EITHER VERTICALLY OR HORIZONTALLY
- WITH SS CLAMPS (OPTIONAL)
- SIZE: Dia. 60 MM (STANDARD) OR Dia. 70 mm (CUSTOMIZED)
- LENGTH : CUSTOMIZATION AVAILABLE



HIGH TEMP HALOGEN LAMP

- IDEAL FOR SPM MACHINES
- IP 67 GRADE PROTECTION
- WATTAGE OPTIONS : 80W
- VOLTAGE OPTIONS : 230V AC
- SUSTAINABLE UP TO 200 DEG. CELSIUS
- COOLANT, WATER-PROOF
- DUST PROOF, HEAT RESISTANT & SHOCK PROOF
- EASILY MOUNTABLE EITHER VERTICALLY OR HORIZONTALLY
- SIZE: Dia. 60 MM (STANDARD) OR Dia. 70 mm (CUSTOMIZED)
- LENGTH : CUSTOMIZATION AVAILABLE



MULTIPURPOSE LAMP

- PLASTIC HOUSING
- BRIGHT LIGHT
- IP 65 GRADE PROTECTION
- WATTAGE OPTION : 7W (1FEET) 14W (2FEET) 20W (2FEET)
- VOLTAGE OPTIONS : 24 V DC / 110V AC / 230 V AC
- HEAT RESISTANT & SHOCK PROOF
- EASILY MOUNTABLE
- WITH MOTION SENSOR (OPTIONAL)
- WITH SWITCH (OPTIONAL)
- SIZE : Dia 32 mm X Height 43 mm X LENGTH CUSTOMIZATION



LED MACHINE LAMP

LED MACHINE LAMP

- BODY MATERIAL : ALUMINIUM DIE CASTING
- IP 65 GRADE PROTECTION
- AVAILABLE IN SHORT ARM / MEDIUM ARM / LONG ARM
- UNIVERSAL BASE
- WATTAGE OPTIONS :14W
- VOLTAGE OPTIONS : 24V AC/ 24V DC / 230V AC
- SIMPLE & ELEGANT 250 DEGREE ADJUSTMENT



GOOSENECK LAMP

- FLEXIBLE ARM
- LENGTH : 400 MM
- UNIVERSAL BASE WITH MAGNET
- VOLTAGE OPTIONS: 7W
- VOLTAGE OPTION: 230VAC
- LIGHTING TYPE : LED
- PORTABLE ROBUST DESIGN
- BRIGHT GLARE FREE LIGHT



ECONOMY MACHINE LAMP

ENERGY SAVING MACHINE LAMP

- METALIC BODY
- ALUMINIUM FOLDABLE ARMS
- IP 54 GRADE PROTECTION
- EXCELENT COOL DAY LIGHT
- WATTAGE OPTIONS : 18W
- VOLTAGE OPTIONS : 24V DC / 230V AC
- EASILY MOUNTABLE



LED ECO LAMP

- ALUMINIUM LAMP HOUSING
- MS POWER COATED FOLDABLE ARMS
- IP 54 GRADE PROTECTION
- AVAILABLE IN 2 ARMS / 3 ARMS
- EXCELENT COOL DAY LIGHT
- WATTAGE OPTIONS : 9W
- VOLTAGE OPTIONS : 24V DC / 230V AC
- EASILY MOUNTABLE



LED ECO LAMP

- PLASTIC HOUSING LAMP
- MS POWER COATED FOLDABLE ARMS
- IP 54 GRADE PROTECTION
- AVAILABLE IN 2 ARMS / 3 ARMS
- EXCELENT COOL DAY LIGHT
- WATTAGE OPTIONS : 8W
- VOLTAGE OPTIONS : 24V DC / 230V AC
- EASILY MOUNTABLE



MPG PENDANT

MPG PENDANT

- WIDELY USED WITH CNC MACHINES
- ALUMINIUM HOUSING
- CUSTOMIZATION AVAILABLE
- ROTARY SWITCHES, PUSH BUTTONS
- CABLE GLAND
- EMERGENCY STOP
- WITHOUT MANUAL PULSE GENERATOR
- OPTION : WITH OR WITHOUT SPIRAL CABLE
- SIZE: 110 X 57 X LENGTH CUSTOMIZATION



MPG PENDANT - COMPLETE

- WIDELY USED WITH CNC MACHINES
- 2 QUADRATURE OUTPUT CHANNEL
- WITH ENABLE SWITCH, EMERGENCY STOP
- AVAILABLE IN 6 AXIS MANIPULATION
- LIGHT WEIGHT WITH MAGNET
- ACCESSIBILITY UPTO 3 METER
- STRONG BODY WITH SHIELDED SPIRAL CABLE
- PRECISELY ENGINEERED



DIGITAL COUNTER

DIGITAL COUNTER

- METALIC BODY
- 4 DIGITS / 6 DIGITS
- I/P VOLTAGE : 230V AC
- LED RANGE : 0 TO 9999 / 0 TO 999999
- SENSOR : 100 mA (RIPPLE 5 % OR LESS)
- MEMORY TYPE : EEPROM
- WITH RESET BUTTON
- SIZE : 265 X 145 X 65 MM (4 DIGITS)
- SIZE : 110 X 45 MM (6 DIGITS)



FRONT PANEL INTERFACE UNIT

FRONT PANEL INTERFACE UNIT

- WIDELY USED WITH CNC MACHINES
- PLASTIC HOUSING
- ROBUST MODULAR DESIGN
- CUSTOMIZATION AVAILABLE
- ANY COMBINATION AVAILABLE
- 3 PIN SOCKET, ETHERNET PORT, USB, ETC.
- SIZE: 100 X 70 X 41 mm & PANEL CUT OUT: 63 X 57 mm
- SUITABLE FOR PANEL THICKNESS 1 TO 3 MM



CABLE HARNESS

CABLE HARNESS - FLAT AND ROUND

- AVAILABLE IN ANY LENGTH
- AVAILABLE IN: 20 / 40 / 50 CORE CABLE (FLAT) 10 / 20 / 34 / 37 / 40 / 50 (ROUND)
- CUSTOMIZATION IN END CONNECTORS



BATTERIES

BATTERIES

- WIDELY USED IN MEMORY BACKUP APPLICATIONS
- MAKE : PANASONIC
- BATTERY VOLTAGE : 6V
- BATTERY TECHNOLOGY : LITHIUM
- MODEL : BR- 2/3 AGCT4A / BR-AGCF2W / BR-CCF2TH
- WITH WIRE LEAD CONNECTOR



BATTERIES

- WIDELY USED IN MEMORY BACK UP APPLICATIONS
- MAKE : SANYO
- PACK OF 1 CELL
- MODEL : CR17450SE R / CR17335SE R
- BATTERY TECHNOLOGY : LITHIUM
- BATTERY VOLTAGE : 3V
- WITH WIRE LEAD CONNECTOR



CUSTOMISED PRODUCTS

FR LIGHT - 2 IN 1

- 2 COLORS (WHITE & GREEN) IN 1 LAMP
- "IN" OR "OUT" INDICATION
- VOLTAGE OPTION : 12VDC / 230V AC
- FUNCTION OPTION : STEADY / BUZZER
- IP 54 GRADE PROTECTION
- WITH MOTION SENSOR
- EASILY MOUNTABLE
- HEAT RESISTANCE & SHOCK PROOF
- SIZE: Dia.115 mm X 38 mm
- CUSTOMIZABLE



FR POLE - 3 IN 1

- 3 COLORS IN 1 LAMP
- WATTAGE OPTION : 20W
- COLOUR OPTION : RED / AMBER / GREEN / BLUE / YELLOW / WHITE
- VOLTAGE OPTION : 12VDC / 230V AC
- FUNCTION OPTION : STEADY / BUZZER
- IP 65 GRADE PROTECTION
- EASILY MOUNTABLE
- SIZE: 2000 X Dia.70 mm
- CUSTOMIZABLE



FR DISPLAY STAND

- DOT MATRIX DISPLAY
- DISPLAY SIZE: 160 MM X 160 MM
- VOLTAGE OPTION : 230V AC
- DISPLAY OUTPUT : CUSTOMIZABLE
- IP 54 GRADE PROTECTION
- WITH MOTION SENSOR
- EASILY MOUNTABLE
- HEAT RESISTANT & SHOCK PROOF
- SIZE: 1500 X 350 X 350 mm
- CUSTOMIZABLE





FORKLIFT LED LIGHT

- BEAM PATTERN : LINE
- PROJECTS AN INTENSE LINE LIGHT UPTO 15 FEET
- ALERTS PEDESTRAINS & OTHER VECHILES
- IP 67 GRADE PROTECTION
- WATTAGE : 9W
- VOLTAGE : 10 TO 80V DC



FORKLIFT LED SPOT LIGHT

- BEAM PATTERN : SPOT
- ALERTS PEDESTRAINS & OTHER VECHILES
- PROJECTS AN INTENSE SPOT LIGHT UPTO 15 FEET
- COLOURS : BLUE / RED
- IP 67 GRADE PROTECTION
- WATTAGE : 9W
- VOLTAGE : 9 TO 48V DC



CABLE GLAND

- PVC CABLE GLAND
- AVAILABLE IN PG 7 TO PG 63
- ALSO AVAILABLE IN M12 TO M63
- COLOUR : GREY / DARK GREY / BLACK



ELECTRICAL CONNECTORS

- HEAVY DUTY INDUSTRIAL CONNECTOR
- MAKE : INDO ELECTRICALS
- AVAILABLE IN 10 Amps /16 Amps/ 35 Amps
- AVAILABLE IN 6/8/10/16/24/32/48/64 PIN
- COMPLETE ASSEMBLY CONSISTING 1 NO. MALE/ FEMALE INSERT /HOOD / HOUSING
- WITHOUT CABLE GLAND – DOUBLE CLAMP



ENCLOSURE JUCTION BOX

- AVAILABLE IN VARIOUS SIZES & MATERIAL
- IP 65 GRADE PROTECTION
- AS (ABS ENCLOSURE)
- PC (POLY CARBONATE ENCLOSURE)
- APC (ABS BASE + PC TRANSPARENT LID)
- PPC (PC BASE + PC TRANSPARENT LID)
- AL (ALUMINIUM ENCLOSURE)



MAGNIFIER

- 130 MM DIA WITH 4X AREA MAGNIFICATION
- 900 MM REACH FROM PIVOT & 600 MM IN VERTICAL PLANE
- ILLUMINATION : LED
- LUMEN OUTPUT : 800 LUMEN
- SHADOW FREE LIGHTING
- LOW POWER CONSUMPTION
- COMFORTABLE DAYLIGHT



CRC PRODUCTS

MAKE - CRC

- CRC INDUSTRIES IS MANUFACTURER & WORLDWIDE SUPPLIER OF MAINTAINCE PRODUCTS
- USED IN AUTOMOTIVE , FOOD PHARMACEUTICALS & ELECTRONIC INDUSTRY, ETC.
- CRC CLEANERS (ELECTRICALS & ELECTRONICS)
- CRC INDUSTRIALS DEGREASER (DEGREASER)
- CRC LUBRICANTS (MECHANICAL)
- CRC ANTI - CORROSION PRODUCTS
- CRC FOOD GRADE PRODUCTS
- CRC ADHESIVES
- **CRC INSULATOR COATING :**
- CRC SPECIAL PRODUCTS
- CRC BATTERY TERMINAL PROTECTOR
- CRC INJECTION MOULDING PRODUCTS
- CRC PCB CONFORMAL COATINGS



www.machinelamp.com

VIVEZA

INNOVATE TO ILLUMINATE



World Class
Rechargeable
Led Hand Lamp.
Made in India.

2 - 3 Hrs. Fast Charging

6500K Cool White

100 SMD LED

Low Mode 6 - 8 Hrs.

High Mode 3 - 4 Hrs.

7W

Thoughtfully designed
SELF STAND to keep
hands free to work.

12
MONTHS OF
MANUFACTURER
WARRANTY



Surya
Manufacturing Company
19, Golden Court, 50 Aundh Road,
Pune - 411020. Maharashtra, India.
(020) - 2569 4455 +91 9158 654 455
info@machinelamp.com



www.machinelamp.com



Book - Post

To,

.....

.....

.....

.....


.....

.....

If undelivered, Please return to :

To,

SURYA MANUFACTURING COMPANY
19, Golden Court, 50 Aundh Road,
Pune, Maharashtra - 411020
Phone No. 020-25694455 (M):9158654455
Email : info@machinelamp.com

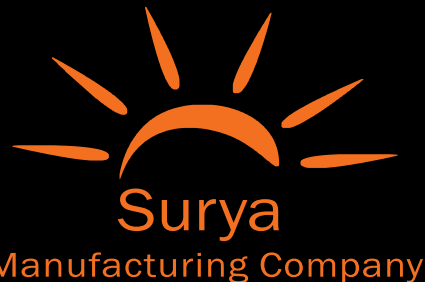

www.machinelamp.com