



### Specifications

<b>Frame Material</b>	Polyamide
<b>Operating Temperature</b>	0°C to 70°C
<b>Protection grade</b>	IP 54
<b>Data Connector</b>	<b>Plug Connector Sub-D</b>
<b>Max. Nominal Voltage</b>	125V AC / 125V DC
<b>Max. Nominal Current</b>	3 Amp
<b>Max. Wire Diameter</b>	20 / 0.05 mm <sup>2</sup>


### Ordering Code

<b>Description</b>	<b>MODEL</b>
With 9 Pin Female, 25 Pin Female Connector & RJ45 Connector 8 Pin Metal CAT6	SMC-PIU-9/45

## Features

- Premium quality Front Panel Interface Unit made of high quality material.
- Tested on well defined parameters which ensures durability.
- CE Certified
- Plug & Socket assembly with universal socket & frame.
- Ideal for Temperature fluctuating conditions.
- IP 54 grade Protection
- Heat Resistant, shock proof & easily mountable
- Stringently checked on various criterion of performance
- Longer functional life
- Meet customized requirements & best in utility.

## Dimensional Drawing

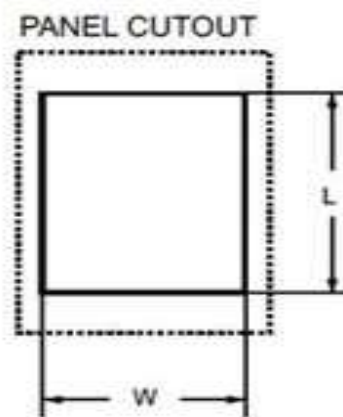

Model	Dimension Outside	Panel Cutout
SMC-PIU-9/45	100 X 70 X 41	63 X 57

- Suitable to Wall thickness : 1 to 3 mm
- Dimensions (L X W X H) in mm