



Specifications

Frame Material	Polyamide
Operating Temperature	0°C to 70°C
Protection grade	IP 54
Plug Socket	Universal Socket
Max. Nominal Voltage	250V AC
Max. Nominal Current	6 Amp
Max. Wire Diameter	Screw Terminals
3 Pin Plug Make	Schneider Electric


Ordering Code

Description	MODEL
With 3 pin Universal Socket 6A-250VAC	SMC-PIU-3P

Features

- Premium quality Front Panel Interface Unit made of high quality material.
- Tested on well defined parameters which ensures durability.
- CE Certified
- Plug & Socket assembly with universal socket & frame.
- Ideal for Temperature fluctuating conditions.
- IP 54 grade Protection
- Heat Resistant, shock proof & easily mountable
- Stringently checked on various criterion of performance
- Longer functional life
- Meet customized requirements & best in utility.

Dimensional Drawing

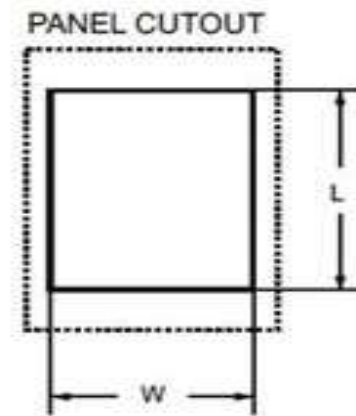

Model	Dimension Outside	Panel Cutout
SMC-PIU-3P	100 X 70 X 41	63 X 57

- Suitable to Wall thickness : 1 to 3 mm
- Dimensions (L X W X H) in mm